



**III. Lens Resolving Power in cycles/mm**

Area-weighted average resolution: 109

<u>Field angle:</u>	<u>0°</u>	<u>7.5°</u>	<u>15°</u>	<u>22.7°</u>	<u>30°</u>	<u>35°</u>	<u>40°</u>
Radial Lines	134	159	134	113	113	95	95
Tangential Lines	134	134	113	113	113	95	95

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

**IV. Filter Parallelism**

The two surfaces of the Wild 420 filter No. 7533 and 525 filter No. 7517 accompanying this camera are within 10 seconds of being parallel. The 525 filter was used for the calibration.

**V. Shutter Calibration**

<u>Indicated Time</u> <u>(sec)</u>	<u>Rise Time</u> <u>(μ sec)</u>	<u>Fall Time</u> <u>(μ sec)</u>	<u>½ Width Time</u> <u>(ms)</u>	<u>Nom. Speed</u> <u>(sec)</u>	<u>Efficiency</u> <u>(%)</u>
1/125	872	870	9.58	1/110	94
1/250	408	411	4.95	1/210	95
1/500	173	171	2.52	1/420	96
1/1000	66	60	1.28	1/800	97

The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is described in International Standard ISO 516:1999(E).


**VI. Film Platen**

The platen mounted in Wild drive unit No. 5242-619 does not depart from a true plane by more than 13 μm (0.0005 in).

This camera is equipped with a platen identification marker that will register "619" in the data strip area for each exposure.

**VII. Principal Point and Fiducial Mark Coordinates**

d  
a  
t  
a  
  
s  
t  
r  
i  
p  
  
s  
i  
d  
e

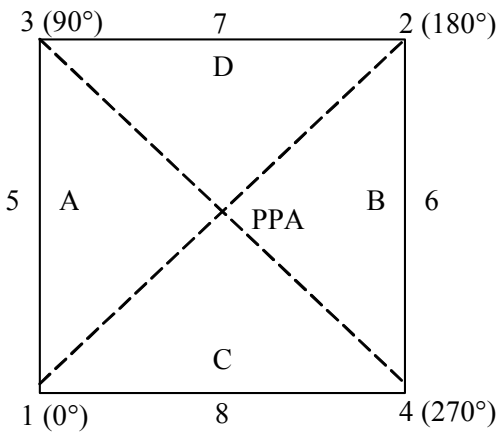

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

	<u>X coordinate (mm)</u>	<u>Y coordinate (mm)</u>
Indicated principal point, corner fiducials	0.014	0.009
Indicated principal point, midside fiducials	0.012	0.006
Principal point of autocollimation (PPA)	0.000	0.000
Calibrated principal point (point of symmetry)	0.001	0.016
<u>Fiducial Marks</u>		
1	-105.991	-105.992
2	106.012	106.003
3	-105.982	106.010
4	106.009	-105.992
5	-111.984	0.010
6	112.017	0.002
7	0.015	112.003
8	0.008	-111.998

**VIII. Distances Between Fiducial marks**

Corner fiducials (diagonals)	1-2: 299.812 mm	3-4: 299.809 mm
Lines joining these markers intersect at an angle o	89° 59' 59"	
Midside fiducials	5-6: 224.002 mm	7-8: 224.001 mm
Lines joining these markers intersect at an angle o	90° 00' 01"	
Corner fiducials (perimeter)	1-3: 212.002 mm	2-3: 211.994 mm
	1-4: 212.001 mm	2-4: 211.995 mm

The Method of measuring these distances is considered accurate within 0.003 mm

**Note:** For GPS applications, the nominal entrance pupil distance from the focal plane is 283 mm.


**IX. Stereomodel Flatness**

**FMC Drive Unit No:** 5242-619

**Base/Height ratio:** 0.6

**Platen ID:** 619

**Maximum angle of field tested:** 40°

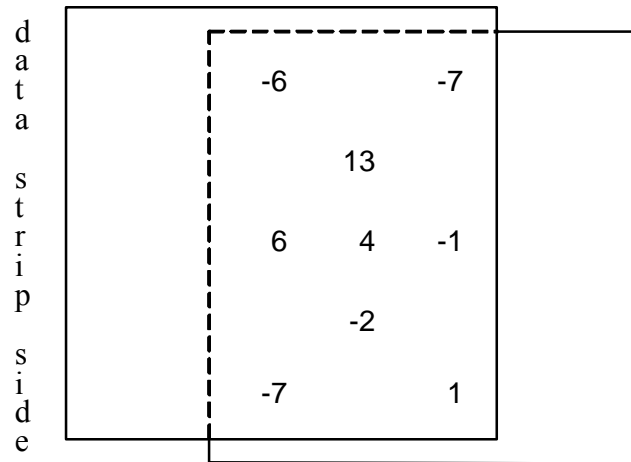

Stereomodel Test Point Array  
(values in micrometers)

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereo models. The values are based on comparator measurements on Agfa Avitone P3P copy film made from Kodak 2405 flim exposures. These measurements are considered accurate to within 5 μm.

**X. System Resolving Power on film in cycles/mm**

**Area-weighted average resolution:** 51

**Film:** Type 2405

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	57	57	57	57	57	48	48
Tangential Lines	57	57	48	48	48	48	48

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/3055, dated June 29, 2004.

Michael G. Benson  
Remote Sensing Technologies Project Manager  
Geography Discipline